


PROFESSIONAL-USE PLOWS **SUPER-DUTY STRAIGHT-BLADE**

VEHICLE APPLICATION: 4X4 ½ TO 1-TON TRUCKS AND SUVs

Steel
 • 7'6"
 • 8'0"
 • 8'6"
 • 9'0"

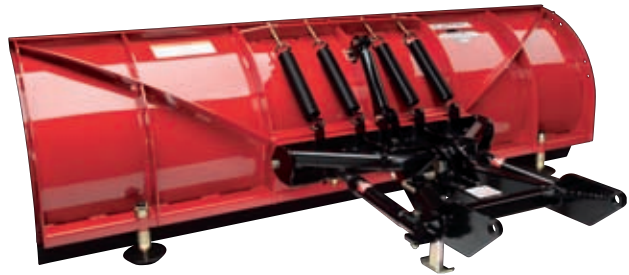

Poly
 • 8'0"



SPECIFICATIONS	7'6" Super-Duty	8'0" Super-Duty	8'6" Super-Duty	9'0" Super-Duty**	8'0" Super-Duty Poly
Blade Width (Straight)	90" (229 cm)	96" (244 cm)	102" (259 cm)	108" (274 cm)	96" (244 cm)
Plowing Width @ 30° Angle	78" (198 cm)	83" (211 cm)	88" (224 cm)	93½" (238 cm)	83" (211 cm)
Blade Height	29" (74 cm)	29" (74 cm)	29" (74 cm)	29" (74 cm)	29" (74 cm)
Blade Thickness	11-ga steel	11-ga steel	11-ga steel	11-ga steel	¾" (1 cm) Poly
Cutting Edge	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)	½" x 6" (1.3 cm x 15 cm)
Reinforcement Ribs	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal	7 vertical, 2 diagonal
Plow Shoes	Cast iron	Cast iron	Cast iron	Cast iron	Cast iron
Trip Springs	4	4	4	4	4
Angle Cylinders	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)	1½" x 10" (4 cm x 25 cm)
Lift Cylinder	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)	2" x 1½" x 10" (5 cm x 3 cm x 25 cm)
Shock Absorber	1	1	1	1	1
Attachment System	SmartHitch 2	SmartHitch 2	SmartHitch 2	SmartHitch 2	SmartHitch 2
Plow Weight*	680 lb ^b (308 kg)	698 lb ^b (317 kg)	720 lb ^b (327 kg)	742 lb ^b (337 kg)	722 lb ^b (328 kg)
Plow Lights	SmartLight 2	SmartLight 2	SmartLight 2	SmartLight 2	SmartLight 2

*Plow weight does not include vehicle mount weight. ^bVehicle mount weight range: 75–105 lb (34–48 kg). **Includes 1-ton trucks with dual rear wheels.

TWO-YEAR LIMITED WARRANTY

ALL BOSS SNOWPLOWS AND EQUIPMENT ARE GUARANTEED TO BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP FOR TWO FULL YEARS FROM THE DATE OF PURCHASE. STOP BY ANY AUTHORIZED BOSS DEALER TO RECEIVE COMPLETE DETAILS ON OUR TWO-YEAR PARTS AND LABOR WARRANTY.

LEGAL STATEMENT

VEHICLES INTENDED TO BE EQUIPPED WITH A SPREADER AND/OR SNOWPLOW MUST COMPLY WITH THE VEHICLE MANUFACTURERS' SPECIFICATIONS FOR EQUIPMENT APPLICATION. BOSS PRODUCTS/NORTHERN STAR INDUSTRIES, INC. RESERVES THE RIGHT UNDER ITS PRODUCT IMPROVEMENT POLICY TO CHANGE CONSTRUCTION OR DESIGN DETAILS AND FURNISH EQUIPMENT WHEN SO ALTERED WITHOUT REFERENCE TO ILLUSTRATIONS OR SPECIFICATIONS USED HEREIN.



BOSS SNOWPLOW PRODUCTS ARE DESIGNED AND MANUFACTURED IN AN APPROVED ISO 9001:2000 REGISTERED FACILITY.

BOSS PRODUCTS ARE COVERED UNDER ONE OR MORE OF THE FOLLOWING PATENT NUMBERS: U.S. PATENTS: 4,074,448; 4,658,519; 5,568,694; 6,170,178; 6,134,814; 6,108,946; 6,467,199; 7,437,839. CANADIAN PATENTS: 1,300,877; 2,330,135. OTHER PATENTS PENDING. ©2009 BOSS PRODUCTS/NORTHERN STAR INDUSTRIES, INC. ALL RIGHTS RESERVED. PRINTED IN U.S.A.



PUSHING THE EDGE

FOR MORE INFORMATION OR
 THE BOSS DEALER NEAREST YOU,
 CALL 800-286-4155 OR VISIT BOSSPLOW.COM